# 4. Software Upgrade and Installation

## 4-1 Main software install process

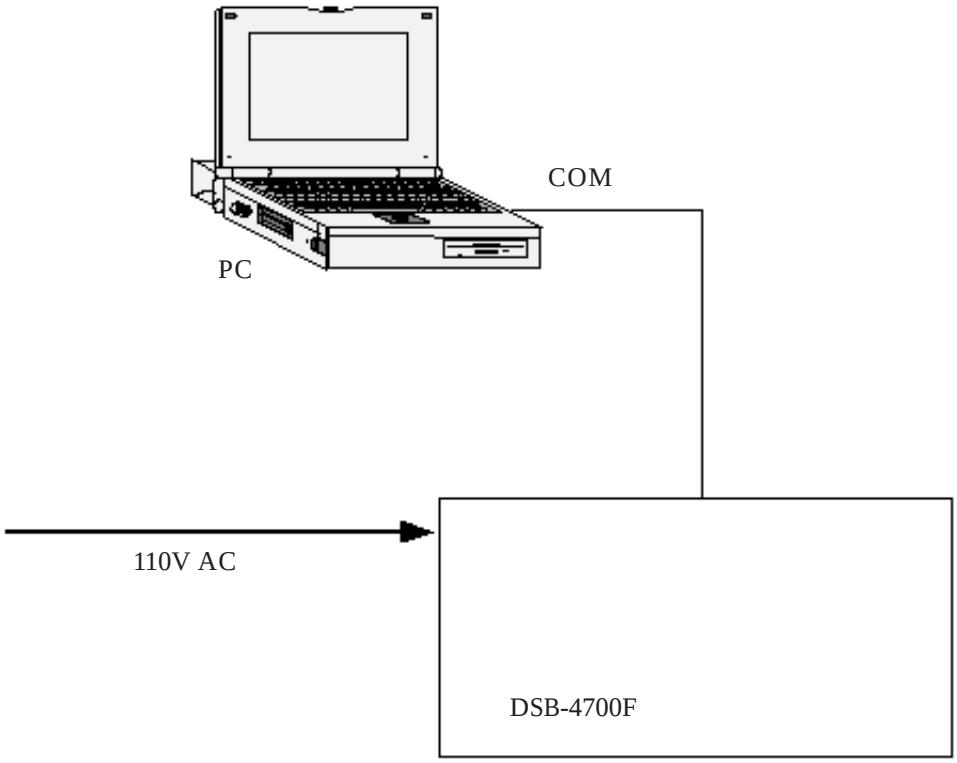


Fig. 4-1

1) Prepare PC and DSB-4700F as above Fig. 4-1
2) Open STB, TRM file while executing hyper terminal of PC
   PORT : Select to COM1 port currently used.
   Baudrate : 115200
3) Run hyperterminal and turn (power) on DSB-4700F
   After hyperterminal monitor display some message, press ‘d’ key
   -DSB-4700F : Samsung brand FTA model loader version x . x
4) Send a file at downlode ROM image. (protocor : 1K xmodem)
5) Select main program (C : main DSB-4700F_final.bin) by each kinds as selecting the file send of transfer or hypertermianl.
6) Check if the normal message appears.

# MEMO